




## IPS

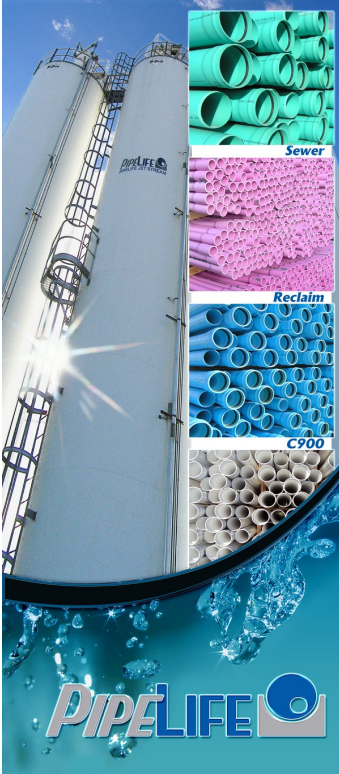

PipeLife Jet Stream manufactures IPS gasketed pipe from 1 1/2" to 12". Our pipes are manufactured under ASTM D2241 and meets or exceeds ANSI/NSF 14 standards.

The primary purpose of PipeLife Jet Stream IPS is for the conveyance of potable water.

PipeLife Jet Stream uses compound according to ASTM D1784—12454 as well as integral gasket joints according to ASTM F477 and ASTM D3139. To aid in the installation of PipeLife Jet Stream's IPS, each spigot end is beveled and includes a depth mark for insertion guidance.

SDR 26 160 PSI			
Size	O.D	Wall Thickness	WT. Per 100 FT.
1 1/2"	1.900	0.073	28.30
2"	2.375	0.091	43.70
2 1/2"	2.875	0.110	63.30
3"	3.500	0.135	93.70
4"	4.500	0.173	158.40
6"	6.625	0.255	343.50
8"	8.625	0.332	584.50
10"	10.750	0.413	907.20
12"	12.750	0.490	1280.20

SDR 21 200 PSI			
Size	O.D	Wall Thickness	WT. Per 100 FT.
1 1/2"	1.900	0.090	34.20
2"	2.375	0.113	53.20
2 1/2"	2.875	0.137	77.40
3"	3.500	0.167	114.30
4"	4.500	0.214	193.40
6"	6.625	0.316	422.00
8"	8.625	0.410	715.70
10"	10.750	0.511	1112.90
12"	12.750	0.606	1569.80

SDR 17 250 PSI			
Size	O.D	Wall Thickness	WT. Per 100 FT.
2"	2.375	0.140	58.20
3"	3.500	0.206	139.80
4"	4.500	0.265	231.80
6"	6.625	0.390	505.70
8"	8.625	0.508	869.20